


# Python Programming: An Introduction To Computer Science



## Chapter 7 Loop Structures and Booleans

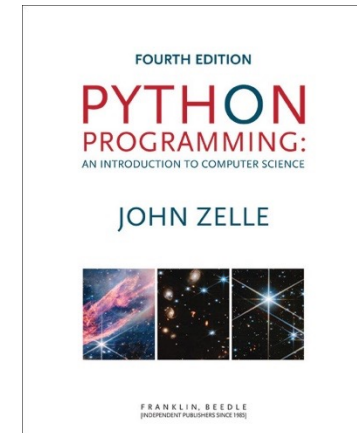

# Objectives

---

- To understand the concepts of definite and indefinite loops as they are realized in the Python `for` and `while` statements.
- To understand the programming patterns interactive loop and sentinel loop and their implementations using a Python `while` statement.



# Objectives

---

- To be able to design and implement solutions to problems involving loop patterns including nested loop structures.
- To understand the basic ideas of Boolean algebra and be able to analyze and write Boolean expressions involving Boolean operators.



# For Loops: A Quick Review

---

- The `for` statement allows us to iterate through a sequence of values.

```
for <var> in <sequence>:  
    <body>
```

- The loop index variable `var` takes on each successive value in the sequence, and the statements in the body of the loop are executed once for each value.



# For Loops: A Quick Review

---

- Suppose we want to write a program that can compute the average of a series of numbers entered by the user.
- To make the program general, it should work with any size set of numbers.
- We don't need to keep track of each number entered, we only need know the running sum and how many numbers have been added.



# For Loops: A Quick Review

---

- Let's write a program to compute the average of a series of numbers entered by the user.
- We've run into some of these things before!
  - A series of numbers could be handled by some sort of loop. If there are  $n$  numbers, the loop should execute  $n$  times.
  - We need a running sum. This will use an accumulator.



# For Loops: A Quick Review

---

Input the count of the numbers,  $n$

Initialize total to 0

Loop  $n$  times

    Input a number,  $x$

    Add  $x$  to total

Output average as  $\text{total}/n$



# For Loops: A Quick Review

---

```
# average1.py
#     A program to average a set of numbers
#     Illustrates counted loop with accumulator

def main():
    n = int(input("How many numbers do you have? "))
    total = 0.0
    for i in range(n):
        x = float(input("Enter a number >> "))
        total = total + x
    print("\nThe average of the numbers is", total / n)
```





# For Loops: A Quick Review

---

```
How many numbers do you have? 5
```

```
Enter a number >> 32
```

```
Enter a number >> 45
```

```
Enter a number >> 34
```

```
Enter a number >> 76
```

```
Enter a number >> 45
```

```
The average of the numbers is 46.4
```



# Indefinite Loops

---

- That last program got the job done, but you need to know ahead of time how many numbers you'll be dealing with.
- What we need is a way for the computer to take care of counting how many numbers there are.
- The `for` loop is a definite loop, meaning that the number of iterations is determined when the loop starts.



# Indefinite Loops

---

- We can't use a definite loop unless we know the number of iterations ahead of time. We can't know how many iterations we need until all the numbers have been entered.
- We need another tool!
- The *indefinite* or *conditional* loop keeps iterating until certain conditions are met.




# Indefinite Loops

---

- `while <condition>:`  
    `<body>`
- `condition` is a Boolean expression, just like in `if` statements. The body is a sequence of one or more statements.
- Semantically, the body of the loop executes repeatedly as long as the condition remains true. When the condition is false, the loop terminates.

# Indefinite Loops

- The condition is tested at the top of the loop. This is known as a *pre-test* loop. If the condition is initially false, the loop body will not execute at all.

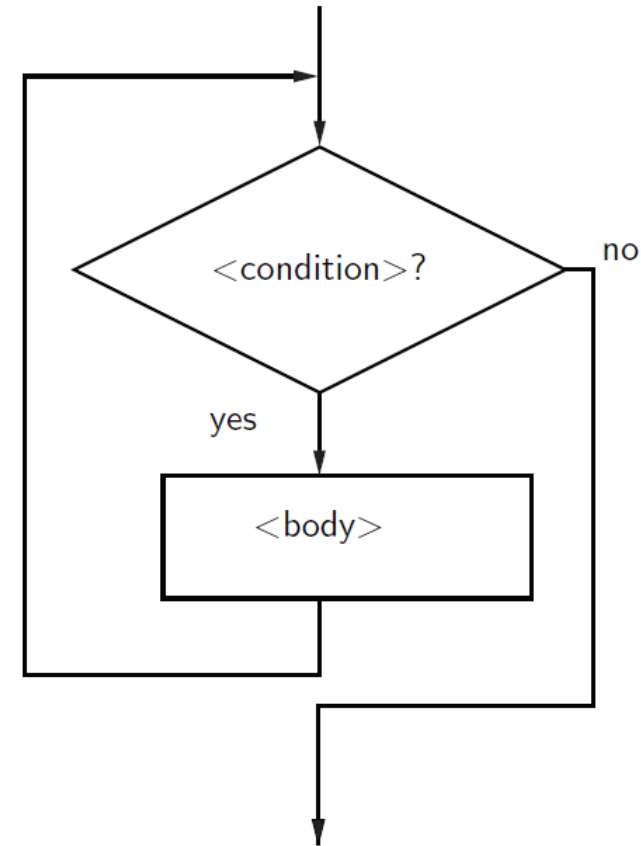



# Indefinite Loop

---

- Here's an example of a `while` loop that counts from 0 to 10:

```
i = 0
while i <= 10:
    print(i)
    i = i + 1
```

- The code has the same output as this `for` loop:

```
for i in range(11):
    print(i)
```



# Indefinite Loop

---

- The `while` loop requires us to manage the loop variable `i` by initializing it to 0 before the loop and incrementing it at the bottom of the body.
- In the `for` loop this is handled automatically.



# Indefinite Loop

---

- The `while` statement is simple, but yet powerful and dangerous – they are a common source of program errors.
- ```
i = 0  
while i <= 10:  
    print(i)
```
- What happens with this code?





# Indefinite Loop

---

- When Python gets to this loop, `i` is equal to 0, which is less than 10, so the body of the loop is executed, printing 0. Now control returns to the condition, and since `i` is still 0, the loop repeats, etc.
- This is an example of an *infinite loop*.



# Indefinite Loop

---

- What should you do if you're caught in an infinite loop?
  - First, try pressing control-c
  - If that doesn't work, try control-alt-delete
  - If that doesn't work, push the reset button!



# Interactive Loops

---

- One good use of the indefinite loop is to write *interactive loops*. Interactive loops allow a user to repeat certain portions of a program on demand.
- Remember how we said we needed a way for the computer to keep track of how many numbers had been entered? Let's use a counter, called `count`.



# Interactive Loops

---

- At each iteration of the loop, ask the user if there is more data to process. We need to preset it to “yes” to go through the loop the first time.
- ```
set moredata to "yes"
while moredata is "yes"
    get the next data item
    process the item
    ask user if there is moredata
```



# Interactive Loops

---

- Combining the interactive loop pattern with accumulators for sum and count:

```
initialize total to 0.0
initialize count to 0
set moredata to "yes"
while moredata is "yes"
    input a number, x
    add x to total
    add 1 to count
    ask user if there is moredata
output total/count
```



# Interactive Loops

---

```
# average2.py
#     A program to average a set of numbers
#     Illustrates interactive loop with two accumulators

def main():
    total = 0.0
    count = 0
    moredata = "yes"
    while moredata[0] == "yes":
        x = float(input("Enter a number >> "))
        total = total + x
        count = count + 1
        moredata = input("Do you have more numbers (yes or no)? ")
    print("\nThe average of the numbers is", total / count)
```



# Interactive Loops

---

```
Enter a number >> 32
Do you have more numbers (yes or no)? yes
Enter a number >> 45
Do you have more numbers (yes or no)? yes
Enter a number >> 34
Do you have more numbers (yes or no)? yes
Enter a number >> 76
Do you have more numbers (yes or no)? yes
Enter a number >> 45
Do you have more numbers (yes or no)? no
```

```
The average of the numbers is 46.4
```



# Sentinel Loops

---

- A *sentinel loop* continues to process data until reaching a special value that signals the end.
- This special value is called the *sentinel*.
- The sentinel must be distinguishable from the data since it is not processed as part of the data.





# Sentinel Loops

---

- `get the first data item`  
`while item is not the sentinel`  
`process the item`  
`get the next data item`
- The first item is retrieved before the loop starts. This is sometimes called the *priming read*, since it gets the process started.
- If the first item is the sentinel, the loop terminates and no data is processed.
- Otherwise, the item is processed and the next one is read.



# Sentinel Loops

---

- In our averaging example, assume we are averaging test scores.
- We can assume that there will be no score below 0, so a negative number will be the sentinel.



# Sentinel Loops

---

```
# average3.py
#     A program to average a set of numbers
#     Illustrates sentinel loop using negative input as sentinel

def main():
    total = 0.0
    count = 0
    x = float(input("Enter a number (negative to quit) >> "))
    while x >= 0:
        total = total + x
        count = count + 1
        x = float(input("Enter a number (negative to quit) >> "))
    print("\nThe average of the numbers is", total / count)
```



# Sentinel Loops

---

```
Enter a number (negative to quit) >> 32
```

```
Enter a number (negative to quit) >> 45
```

```
Enter a number (negative to quit) >> 34
```

```
Enter a number (negative to quit) >> 76
```

```
Enter a number (negative to quit) >> 45
```

```
Enter a number (negative to quit) >> -1
```

The average of the numbers is 46.4



# Sentinel Loops

---

- This version provides the ease of use of the interactive loop without the hassle of typing ‘yes’ all the time.
- There’s still a shortcoming – using this method we can’t average a set of positive *and negative* numbers.
- If we do this, our sentinel can no longer be a number.



# Sentinel Loops

---

- We could input all the information as strings.
- Valid input would be converted into numeric form. Use a character-based sentinel.
- We could use the *empty string* (“”)!



# Sentinel Loops

---

```
initialize total to 0.0
initialize count to 0
input data item as a string, xStr
while xStr is not empty
    convert xStr to a number, x
    add x to total
    add 1 to count
    input next data item as a string, xStr
output total / count
```



# Sentinel Loops

---

```
# average4.py
#   A program to average a set of numbers
#   Illustrates sentinel loop using empty string as sentinel

def main():
    total = 0.0
    count = 0
    xStr = input("Enter a number (<Enter> to quit) >> ")
    while xStr != "":
        x = float(xStr)
        total = total + x
        count = count + 1
        xStr = input("Enter a number (<Enter> to quit) >> ")
    print("\nThe average of the numbers is", total / count)
```





# Sentinel Loops

---

```
Enter a number (<Enter> to quit) >> 34
```

```
Enter a number (<Enter> to quit) >> 23
```

```
Enter a number (<Enter> to quit) >> 0
```

```
Enter a number (<Enter> to quit) >> -25
```

```
Enter a number (<Enter> to quit) >> -34.4
```

```
Enter a number (<Enter> to quit) >> 22.7
```

```
Enter a number (<Enter> to quit) >>
```

```
The average of the numbers is 3.383333333333
```



# Computing with Booleans

---

- `if` and `while` both use Boolean expressions.
- Boolean expressions evaluate to `True` or `False`.
- So far we've used Boolean expressions to compare two values, e.g. (`while x >= 0`)



# Boolean Operators

---

- Sometimes our simple expressions do not seem expressive enough.
- Suppose you need to determine whether two points are in the same position – their  $x$  coordinates are equal and their  $y$  coordinates are equal.



# Boolean Operators

---

- ```
if p1.getX() == p2.getX():  
    if p1.getY() == p2.getY():  
        # points are the same  
    else:  
        # points are different  
else:  
    # points are different
```
- Clearly, this is an awkward way to evaluate multiple Boolean expressions!
- Let's check out the three Boolean operators `and`, `or`, and `not`.



# Boolean Operators

---

- The Boolean operators `and` and `or` are used to combine two Boolean expressions and produce a Boolean result.
- `<expr> and <expr>`
- `<expr> or <expr>`



# Boolean Operators

---

- The `and` of two expressions is true exactly when both of the expressions are true.
- We can represent this in a *truth table*.

| P | Q | P and Q |
|---|---|---------|
| T | T | T       |
| T | F | F       |
| F | T | F       |
| F | F | F       |



# Boolean Expressions

---

- In the truth table,  $P$  and  $Q$  represent smaller Boolean expressions.
- Since each expression has two possible values, there are four possible combinations of values.
- The last column gives the value of  $P$  and  $Q$  for each combination.



# Boolean Expressions

---

- The `or` of two expressions is true when either expression is true.

| P | Q | P or Q |
|---|---|--------|
| T | T | T      |
| T | F | T      |
| F | T | T      |
| F | F | F      |





# Boolean Expressions

---

- The only time `or` is false is when both expressions are false.
- Also, note that `or` is true when both expressions are true. This isn't how we normally use "or" in language.



# Boolean Operators

---

- The `not` operator computes the opposite of a Boolean expression.
- `not` is a *unary* operator, meaning it operates on a single expression.

| <b>P</b> | <b>not P</b> |
|----------|--------------|
| T        | F            |
| F        | T            |



# Boolean Operators

---

- We can put these operators together to make arbitrarily complex Boolean expressions.
- The interpretation of the expressions relies on the precedence rules for the operators.



# Boolean Operators

---

- Consider `a or not b and c`
- How should this be evaluated?
- The order of precedence, from high to low, is `not`, `and`, `or`.
- This statement is equivalent to  
`(a or ((not b) and c))`
- Since most people don't memorize the Boolean precedence rules, use parentheses to prevent confusion.



# Boolean Operators

---

- To test for the co-location of two points, we could use **an** `and`.
- ```
if p1.getX() == p2.getX() and p2.getY() == p1.getY():  
    # points are the same  
else:  
    # points are different
```
- The entire condition will be true *only* when both of the simpler conditions are true.



# Boolean Operators

---

- Say you're writing a racquetball simulation. The game is over as soon as either player has scored 15 points.
- How can you represent that in a Boolean expression?
- `scoreA == 15 or scoreB == 15`
- When either of the conditions becomes true, the entire expression is true. If neither condition is true, the expression is false.



# Boolean Operators

---

- We want to construct a loop that continues as long as the game is **not** over.
- You can do this by taking the negation of the game-over condition as your loop condition!
- ```
while not(scoreA == 15 or scoreB == 15):  
    #continue playing
```



# Boolean Operators

---

- Some racquetball players also use a shutout condition to end the game, where if one player has scored 7 points and the other person hasn't scored yet, the game is over.
- `a == 15 or b == 15 or (a == 7 and b == 0) or (b == 7 and a == 0)`





# Boolean Operators

---

- Let's look at volleyball scoring. To win, a volleyball team needs to win by at least two points.
- In volleyball, a team wins at 15 points
- If the score is 15 – 14, play continues, just as it does for 21 – 20.
- `(a >= 15 and a - b >= 2) or (b >= 15 and b - a >= 2)`
- `(a >= 15 or b >= 15) and abs(a - b) >= 2`



# Boolean Algebra

---

- The ability to formulate, manipulate, and reason with Boolean expressions is an important skill.
- Boolean expressions obey certain algebraic laws called *Boolean logic* or *Boolean algebra*.



# Boolean Algebra

| algebra     | Boolean algebra                   |
|-------------|-----------------------------------|
| $a * 0 = 0$ | <code>a and false == false</code> |
| $a * 1 = a$ | <code>a and true == a</code>      |
| $a + 0 = a$ | <code>a or false == a</code>      |

- `and` has properties similar to multiplication
- `or` has properties similar to addition
- `0` and `1` correspond to `false` and `true`, respectively.



# Boolean Algebra

---

- Anything `or`ed with `true` is `true`:

`a or True == True`

- Both `and` and `or` distribute:

`(a or (b and c)) == ((a or b) and (a or c))`

`(a and (b or c)) == ((a and b) or (a and c))`

- Double negatives cancel out:

`(not(not a)) == a`

- DeMorgan's laws:

`(not(a or b)) == ((not a) and (not b))`

`(not(a and b)) == ((not a) or (not b))`



# Boolean Algebra

---

- We can use these rules to simplify our Boolean expressions.
- ```
while not(scoreA == 15 or scoreB == 15):  
    #continue playing
```
- This is saying something like “While it is not the case that player A has 15 or player B has 15, continue playing.”
- Applying DeMorgan’s law:  

```
while (not scoreA == 15) and (not scoreB == 15):  
    #continue playing
```



# Boolean Algebra

---

- This becomes:

```
while scoreA != 15 and scoreB != 15  
    # continue playing
```

- Isn't this easier to understand? "While player A has not reached 15 and player B has not reached 15, continue playing."



# Boolean Algebra

---

- Sometimes it's easier to figure out when a loop should stop, rather than when the loop should continue.
- In this case, write the loop termination condition and put a `not` in front of it. After a couple applications of DeMorgan's law you are ready to go with a simpler but equivalent expression.



# Other Common Structures

---

- The `if` and `while` can be used to express every conceivable algorithm.
- For certain problems, an alternative structure can be convenient.






# Post-Test Loop

---

- Say we want to write a program that is supposed to get a nonnegative number from the user.
- If the user types an incorrect input, the program asks for another value.
- This process continues until a valid value has been entered.
- This process is *input validation*.

# Post-Test Loop

```
repeat  
    get a number from the user  
until number is  $\geq 0$ 
```

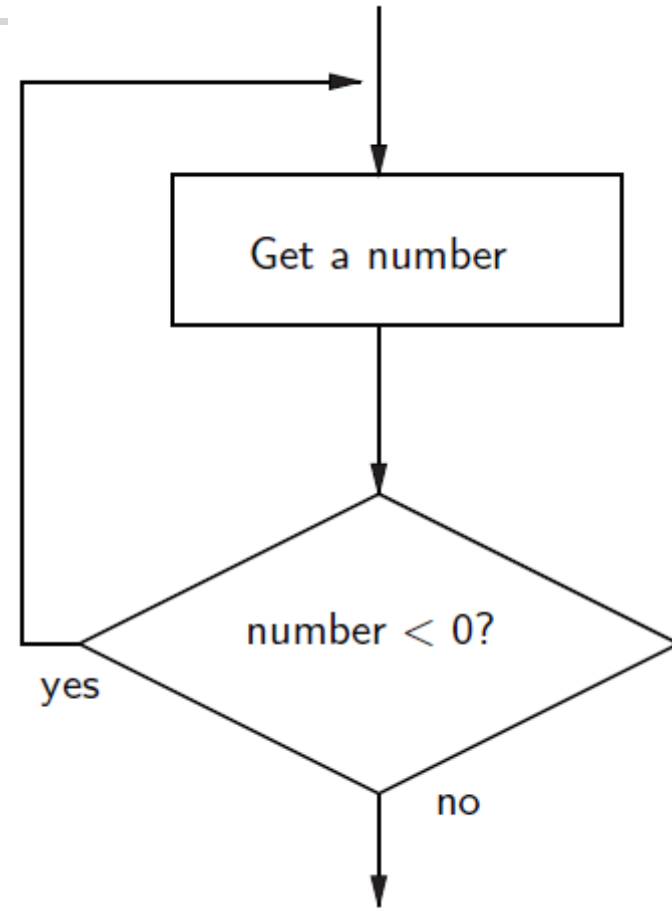



# Post-Test Loop

---

- When the condition test comes after the body of the loop it's called a *post-test loop*.
- A post-test loop always executes the body of the code at least once.
- Python doesn't have a built-in statement to do this, but we can do it with a slightly modified `while` loop.



# Post-Test Loop

---

- We seed the loop condition so we're guaranteed to execute the loop once.
- ```
number = -1          # start with an illegal value
while number < 0:    # to get into the loop
    number = float(input("Enter a positive number: "))
```
- By setting `number` to `-1`, we force the loop body to execute at least once.



# Post-Test Loop

---

- Some programmers prefer to simulate a post-test loop by using the Python `break` statement.
- Executing `break` causes Python to immediately exit the enclosing loop.
- `break` is sometimes used to exit what looks like an infinite loop.



# Post-Test Loop

---

- The same algorithm implemented with a `break`:

```
while True:
    number = float(input("Enter a positive number: "))
    if x >= 0: break # Exit loop if number is valid
```

- A while loop continues as long as the expression evaluates to true. Since `True` *always* evaluates to true, it looks like an infinite loop!



# Post-Test Loop

---

- When the value of  $x$  is nonnegative, the `break` statement executes, which terminates the loop.
- If the body of an `if` is only one line long, you can place it right after the `!`
- Wouldn't it be nice if the program gave a warning when the input was invalid?



# Post-Test Loop

---

- In the `while` loop version, this is awkward:

```
number = -1
while number < 0:
    number = float(input("Enter a positive number: "))
    if number < 0:
        print("The number you entered was not positive")
```

- We're doing the validity check in two places!





# Post-Test Loop

---

- Adding the warning to the `break` version only adds an `else` statement:

```
while True:
    number = float(input("Enter a positive number: "))
    if x >= 0:
        break # Exit loop if number is valid
    else:
        print("The number you entered was not positive.")
```



# Loop and a Half

---

- Stylistically, some programmers prefer the following approach:

```
while True:
    number = float(input("Enter a positive number: "))
    if x >= 0: break # Loop exit
    print("The number you entered was not positive")
```

- Here the loop exit is in the middle of the loop body. This is what we mean by a *loop and a half*.



# Loop and a Half


---

- The loop and a half is an elegant way to avoid the priming read in a sentinel loop.
- ```
while True:  
    get next data item  
    if the item is the sentinel: break  
    process the item
```
- This method is faithful to the idea of the sentinel loop, the sentinel value is not processed!



# Loop and a Half

---

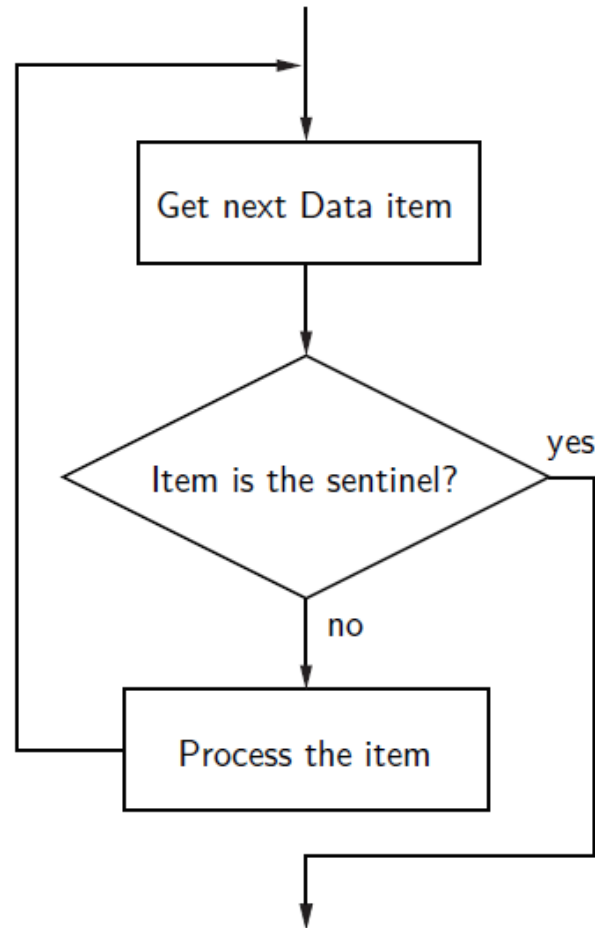



# Loop and a Half

---

- To use or not use `break`. That is the question!
- The use of `break` is mostly a matter of style and taste.
- Avoid using `break` often within loops, because the logic of a loop is hard to follow when there are multiple exits.



# Boolean Expressions as Decisions

---

- Boolean expressions can be used as control structures themselves.
- Suppose you're writing a program that keeps going as long as the user enters a response of 'y'.
- One way you could do it:  

```
while response == "y" or response == "Y":
```



# Boolean Expressions as Decisions

---

- Be careful! You can't take shortcuts:  
`while response == "y" or "Y":`
- Why doesn't this work?
- Python has a `bool` type that internally uses 1 and 0 to represent `True` and `False`, respectively.
- The Python condition operators, like `==`, always evaluate to a value of type `bool`.



# Boolean Expressions as Decisions

---

- However, Python will let you evaluate any built-in data type as a Boolean. For numbers (int, float, and long ints), zero is considered `False`, anything else is considered `True`.





# Boolean Expressions as Decisions

---

```
>>> bool(0)
False
>>> bool(1)
True
>>> bool(32)
True
>>> bool("Hello")
True
>>> bool("")
False
>>> bool([1, 2, 3])
True
>>> bool([])
False
```



# Boolean Expressions as Decisions

---

- An empty sequence is interpreted as `False` while any non-empty sequence is taken to mean `True`.
- The Boolean operators have operational definitions that make them useful for other purposes.



# Boolean Expressions as Decisions

Operator	Operational definition
x and y	If x is false, return x. Otherwise, return y.
x or y	If x is true, return x. Otherwise, return y.
not x	If x is false, return True. Otherwise, return False.



# Boolean Expressions as Decisions

---

- Consider  $x$  and  $y$ . In order for this to be true, both  $x$  and  $y$  must be true.
- As soon as one of them is found to be false, we know the expression as a whole is false and we don't need to finish evaluating the expression.
- So, if  $x$  is false, Python should return a false result, namely  $x$ .



# Boolean Expressions as Decisions

---

- If  $x$  is true, then whether the expression as a whole is true or false depends on  $y$ .
- By returning  $y$ , if  $y$  is true, then true is returned. If  $y$  is false, then false is returned.



# Boolean Expressions as Decisions

---

- These definitions show that Python's Booleans are *short-circuit* operators, meaning that a true or false is returned as soon as the result is known.
- In an `and` where the first expression is false and in an `or`, where the first expression is true, Python will not evaluate the second expression.



# Boolean Expressions as Decisions

---

- `response == "y" or "Y"`
- The Boolean operator is combining two operations.
- Here's an equivalent expression:  
`(response == "y") or ("Y")`
- By the operational description of `or`, this expression returns either `True`, if `response[0]` equals `"y"`, or `"Y"`, both of which are interpreted by Python as `true`.



# Boolean Expressions as Decisions

---

- Sometimes we write programs that prompt for information but offer a default value obtained by simply pressing `<Enter>`
- Since the string used by `ans` can be treated as a Boolean, the code can be further simplified.





# Boolean Expressions as Decisions

---

- ```
ans = input("What flavor of you want [vanilla]: ")  
if ans:  
    flavor = ans  
else:  
    flavor = "vanilla"
```
- If the user just hits <Enter>, `ans` will be an empty string, which Python interprets as false.



# Boolean Expressions as Decisions

---

- We can code this even more succinctly!

```
ans = input("What flavor do you want [vanilla]: ")
flavor = ans or "vanilla"
```

- Remember, any non-empty answer is interpreted as `True`.

- This exercise could be boiled down into one line!

```
flavor = input("What flavor do you want [vanilla]:" ) or "vanilla"
```



# Boolean Expressions as Decisions

---

- Again, if you understand this method, feel free to utilize it. Just make sure that if your code is tricky, that it's well documented!